

SINEAX P530 / Q531

Transducer for Active or Reactive Power

Carrying housing P13/70 resp. P18/105



Application

The transducer **SINEAX P530/Q531** (Fig. 1) converts to active or reactive power of a single-phase AC or three-phase system with balanced or unbalanced loads.

The output signal is proportional to the measured value of the active or reactive power and is either a **load-independent** DC current or a **load-independent** DC voltage.

The transducer fulfils all the important requirements and regulations concerning electromagnetic compatibility **EMC** and **Safety** (IEC 1010 resp. EN 61 010). It was developed and is manufactured and tested in strict accordance with the **quality assurance standard** ISO 9001.

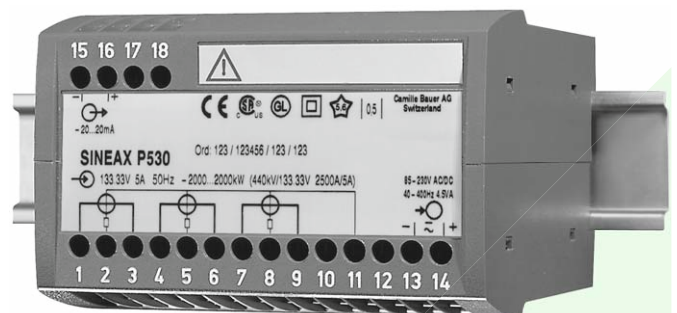


Fig. 1. Transducer SINEAX P530 in housing **P18/105** clipped onto a top-hat rail.

Features / Benefits

- Measuring inputs: Sine wave forms of nominal input currents and nominal input voltages

Measured variables	Nominal input current	Nominal input voltage
Active or reactive power	1 to 6 A	100 to 690 V

- Measuring output: Unipolar, bipolar or live zero output variables
- Measuring principle / TDM system
- DC-, AC-power pack with wide power supply tolerance / Universal
- Standard as marine version per Lloyd's Register of Shipping

Technical data

General

Measured quantity: Active or reactive power, unipolar or bipolar (in 4 quadrants)

Measuring principle: Pulse duration modulation (Time-Division-Multiplikation, TDM)

Measuring input

Nominal frequency f_N : 50 or 60 Hz, sine

Nominal input voltage U_N : 100 ... 690 V
(85 ... 230 V with power supply from voltage measuring input)

Nominal input current I_N : 1 to 6 A

Calibration factor c: 0.75 to 1.3 with active power
0.5 to 1.0 with reactive power

Admissible measuring range and values (calibration factor c):

Acc. to table 2, feature 6

Own consumption: $\leq I^2 \cdot 0.01 \Omega$ per current path
 $U^2 / 400 k\Omega$ per voltage path

Overload capacity:

Measured quantities I_N, U_N	Number of applications	Duration of one application	Interval between two successive applications
$1.2 \times I_N$	—	continuous	—
$20 \times I_N$	10	1 s	100 s
$1.2 \times U_N^1$	—	continuous	—
$2 \times U_N^1$	10	1 s	10 s

¹ But max. 264 V with power supply from voltage measuring input

Measuring output

Load independent

DC current: 0 ... 1.0 to 0 ... 20 mA
resp. live-zero 0.2 ... 1 to 4 ... 20 mA
 ± 1.0 to ± 20 mA

Burden voltage: ± 15 V

SINEAX P530 / Q531

Transducer for Active or Reactive Power

Load independent
DC voltage:

0 ... 1 to 0 ... 10 V resp.
live-zero 0.2 ... 1 to 2 ... 10 V
 ± 1 V to ± 10 V

Load capacity:

4 mA

Voltage limit under
 $R_{\text{ext}} = \infty$:

≤ 40 V

Current limit under
overload:

Approx. $1.3 \times I_{\text{AN}}$ at current output
Approx. 30 mA at voltage output

Residual ripple in
output current:

$< 1\%$ p.p.

Response time:

< 300 ms

Accuracy (acc. to EN 60 688)

Reference value:

Output end value

Basic accuracy:

Class 0.5

Reference conditions:

Ambient temperature

15 ... 30 °C

Input current

$I_N \cdot c$

Input voltage

U_N

Power factor

$\cos\phi = 0.8 \dots 1.0 \dots 0.8$
with active power
 $\cos\phi = 0.8 \dots 1.0 \dots 0.8$
with reactive power

Frequency

50 or 60 Hz

Wave form

Sine, distortion factor $< 1\%$

Power supply

At nominal range

Output burden

Current: $0.5 \cdot R_{\text{ext}}$ max.
Voltage: $2 \cdot R_{\text{ext}}$ min.

Safety

Protection class:

II (protection isolated, EN 61 010)

Protection:

IP 40, housing
(test wire, EN 60 529)
IP 20, terminals
(test finger, EN 60 529)

Pollution degree:

2

Installation category:

III

Rated insulation voltage
(against earth):

400 V, inputs
230 V, power supply
40 V, output

Test voltage:

50 Hz, 1 min. acc. to EN 61 010-1
5550 V, inputs versus all other circuits
as well as outer surface
3250 V, input circuits versus each
other
3700 V, power supply versus output
as well as outer surface
490 V, output versus outer surface

Power supply →○

DC-, AC-power pack (DC or 40 ... 400 Hz)

Table 1: Rated voltages and permissible variations

Rated voltage	Tolerance
85 ... 230 V DC, AC	DC $- 15 \dots + 33\%$
24 ... 60 V DC, AC	AC $\pm 15\%$

Power consumption:

Approx. 2.5 W resp. 4.5 VA

Options

Power supply from

voltage measuring input:

≥ 85 to 230 V AC
(Nominal input voltage range =
internal power supply range)

Connected to the
low tension:

24 V AC or 24 ... 60 V DC

Installation data

Mechanical design:

Housing **P13/70** resp. **P18/105**

Material of housing:

Lexan 940 (polycarbonate)
flammability Class V-0 acc. to UL
94, self-extinguishing, non-dripping,
free of halogen

Mounting:

For rail mounting

Mounting position:

Any

Weight:

Housing P13/70 approx. 0.3 kg
Housing P18/105 approx. 0.7 kg

Connecting terminals

Connection element:

Screw-type terminals with indirect
wire pressure

Permissible cross section
of the connection leads:

≤ 4.0 mm² single wire or
2 x 2.5 mm² fine wire

Environmental conditions

Operating temperature:

$- 10$ to $+ 55$ °C

Storage temperature:

$- 40$ to $+ 70$ °C

Relative humidity of
annual mean:

$\leq 75\%$

Altitude:

2000 m max.

Indoor use statement!

Ambient tests

EN 60 068-2-6:

Vibration

Acceleration:

± 2 g

Frequency range:

10 ... 150 ... 10 Hz, rate of frequency
sweep: 1 octave/minute

Number of cycles:

10, in each of the three axes

SINEAX P530 / Q531

Transducer for Active or Reactive Power

EN 60 068-2-27:	Shock	Germanischer Lloyd	
Acceleration:	3 x 50 g 3 shocks each in 6 directions	Type approval certificate:	No. 12 260-98 HH
EN 60 068-2-1/-2/-3:	Cold, dry heat, damp heat	Ambient category:	C
IEC 1000-4-2/-3/-4/-5/-6		Vibration:	0.7 g
EN 55 011:	Electromagnetic compatibility		

Table 2: Specification and ordering information

Description	*Blocking code	No-go with blocking code	Article No./ Feature
Order Code xxx - xxxx xxxx xx			
Features, Selection			
SINEAX P530, Transducer for active power			530 –
SINEAX Q531, Transducer for reactive power			531 –
1. Mechanical design Housing type P for rail mounting			4
2. Measuring mode / Application 3-wire 3-phase balanced load, housing P18/105 Type 530 (active power) available also for 4-wire 3-phase balanced load			1
3-wire 3-phase unbalanced load, housing P18/105			2
4-wire 3-phase unbalanced load, housing P18/105			3
Single-phase AC, housing P13/70	E		4
3. Nominal input frequency 50 Hz			1
60 Hz			2
4. Nominal input voltage (measuring input) 100 ... 115 V [V]			1
200 ... 230 V [V]			2
380 ... 440 V Single-phase AC max. 400 V [V]	A		3
600 ... 690 V Not possible with single-phase AC [V]	A	E	4
Non-standard U_N Non-standard [V]: ≥ 115.00 to < 600 with 3-phase system, ≥ 57.73 to ≤ 400 with single-phase AC; With power supply from measuring input max. 230 V [V]			9
Lines 1 to 9: Without PT: Specify effective nominal voltage With PT: Specify primary/secondary voltage in V, e.g. 16000/100 Input voltage U_N : – line-to-line voltage with 3-phase system – line-to-neutral voltage with single-phase AC			
5. Nominal input current (measuring input) 1 A [A]			1
5 A [A]			2
Non-standard I_N [A] > 1 to ≤ 6 A [A]			9
With CT: Specify primary/secondary current in A			

SINEAX P530 / Q531

Transducer for Active or Reactive Power

Description	*Blocking code	No-go with blocking code	Article No./ Feature
Order Code xxx - xxxx xxxx xx			
Features, Selection			
SINEAX P530, Transducer for active power			530 –
SINEAX Q531, Transducer for reactive power			531 –
6. Measuring range W or Var			
Measuring range bipolar [W] or [Var] <input type="text"/>			1
Measuring range unipolar [W] or [Var] <input type="text"/>	B		2
Specify measuring range in W or Var, e.g. 500 at measuring range bipolar – 500 ... + 500 1000 at measuring range unipolar 0 ... 1000 Admissible measuring range end values (calibration factor c) With single-phase AC active power ≥ 0.75 to $1.3 \cdot U_N \cdot I_N$ With single-phase AC reactive power ≥ 0.5 to $1.0 \cdot U_N \cdot I_N$ With 3-phase system active power ≥ 0.75 to $1.3 \cdot \sqrt{3} \cdot U_N \cdot I_N$ With 3-phase system reactive power ≥ 0.5 to $1.0 \cdot \sqrt{3} \cdot U_N \cdot I_N$			
7. Output signal, start value			
Output bipolar, start value – 100% final value Not possible with unipolar measuring range		B	1
Output unipolar, start value 0			2
Output live-zero, start value 20% final value			3
8. Output signal, final value			
Output final value 20 mA			1
Output final value 10 mA			2
Output final value 5 mA			3
Output final value 2.5 mA			4
Output final value 1 mA			5
Non-standard (> 1.00 to < 20) [mA] <input type="text"/>			9
Output final value 10 V			A
Non-standard (1.00 to < 10) [V] <input type="text"/>			Z
9. Power supply			
85 ... 230 V DC, AC			1
24 ... 60 V DC, AC			2
From measuring input (≥ 85 to 230 V AC)		A	4
Connected to the low tension side 24 V AC / 24 ... 60 V DC			5
10. Additional lettering on type label			
Without additional lettering on type label			0
With additional lettering on type label 1 line with max. 40 letters, e.g. measuring location			9
11. Test records			
Without test records			0
Test records in German			D
Test records in English			E

*Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "SCODE".

SINEAX P530 / Q531

Transducer for Active or Reactive Power

Electrical connections

Terminal allocation housing P13/70

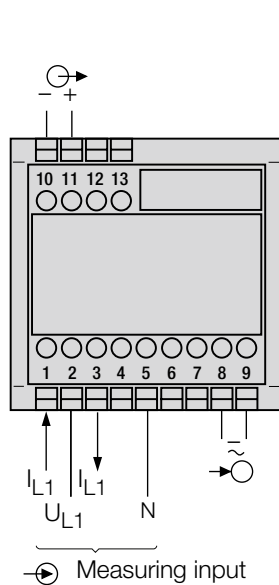


Fig. 2. Power supply connected to terminals 8 and 9.

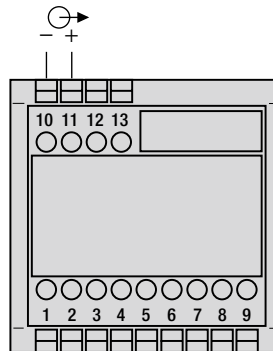


Fig. 3. Power supply internal from measuring input, without separated power supply.

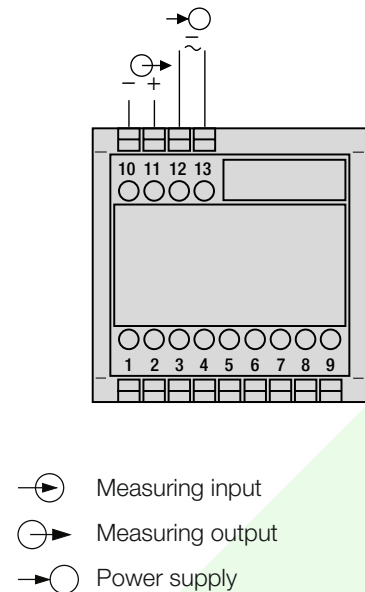


Fig. 4. Power supply connected to the low tension terminal side 12 and 13.

Terminal allocation housing P18/105

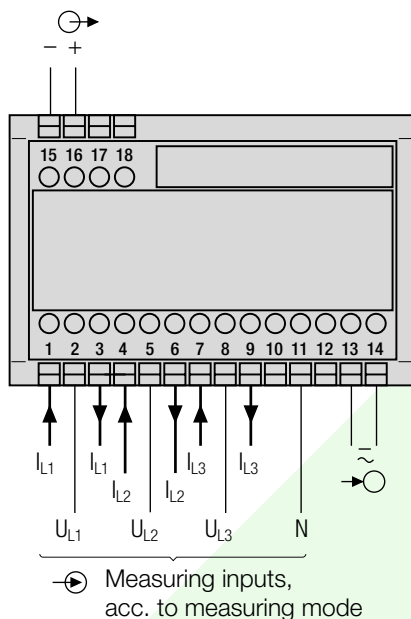


Fig. 5. Power supply connected to terminals 13 and 14.

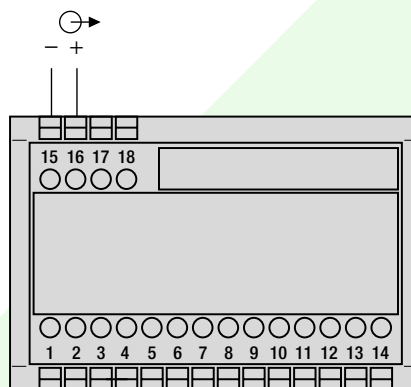


Fig. 6. Power supply internal from measuring input, without separated power supply.

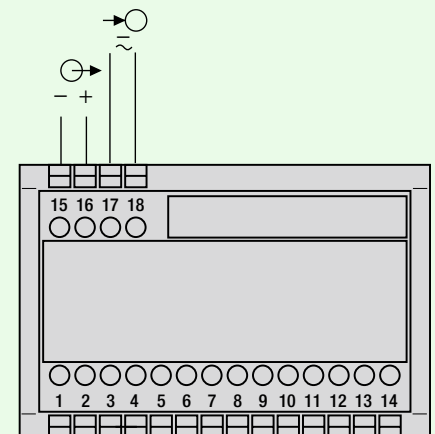


Fig. 7. Power supply connected to the low tension terminal side 17 and 18.

SINEAX P530 / Q531

Transducer for Active or Reactive Power

Measuring inputs	
Meas. mode/ Application	Terminal allocation
Active or reactive power measurement in single-phase AC network	<div> </div> <div> </div> <div> </div>
Active or reactive power measurement in 3-wire 3-phase network balanced load	<div> </div> <div> </div> <div> </div>
Active or reactive power measurement in 3-wire 3-phase network unbalanced load	<div> </div> <div> </div> <div> </div>
Active power measurement in 4-wire 3-phase network balanced load	<div> </div> <div> </div> <div> </div>

SINEAX P530 / Q531

Transducer for Active or Reactive Power

Measuring inputs	
Meas. mode/ Application	Terminal allocation
Active or reactive power measurement in 4-wire 3-phase network unbalanced load	
	<p>3 single-pole insulated voltage transformer in the high-voltage system</p>

Dimensional drawings

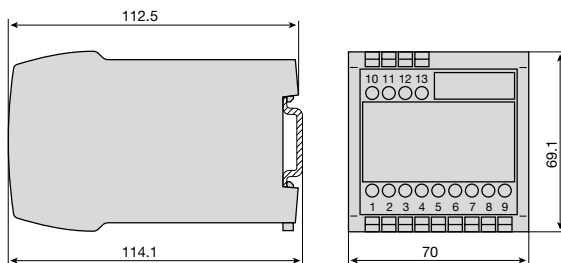


Fig. 8. SINEAX P530/Q531 in housing **P13/70** clipped onto a top-hat rail (35 x 15 mm or 35 x 7.5 mm, acc. to EN 50 022).

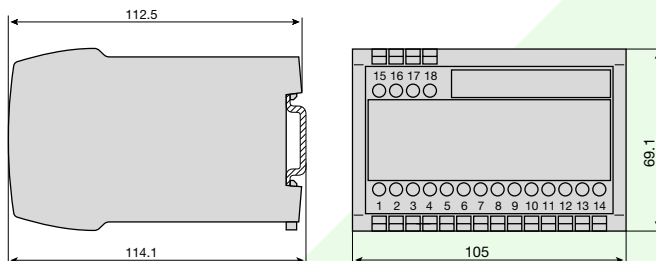


Fig. 9. SINEAX P530/Q531 in housing **P18/105** clipped onto a top-hat rail (35 x 15 mm or 35 x 7.5 mm, acc. to EN 50 022).

Standard accessories

1 Operating Instructions in three languages: German, French and English

CAMILLE BAUER
Rely on us.

Camille Bauer Ltd
Aargauerstrasse 7
CH-5610 Wohlen / Switzerland
Phone: +41 56 618 21 11
Fax: +41 56 618 35 35
e-Mail: info@camillebauer.com
www.camillebauer.com